
TEMPORARY FENCE CONSTRUCTION

- 1. FENCES MAY BE CONSTRUCTED WITHOUT A TOP AND BOTTOM RAIL.
- 2. GATES MUST REMAIN IN GOOD WORKING ORDER AND MUST BE CLOSED AND SECURED DURING NON-WORKING HOURS.
- 3. GATES SHALL BE CONSTRUCTED SO THAT THEY SWING IN TOWARDS THE CONSTRUCTION SITE.
- 4. GATES MUST BE CONSTRUCTED WITH THE SAME DESIGN CHARACTERISTICS AS THE TEMPORARY CONSTRUCTION FENCE.
- 5. DARK GREEN FABRIC SCREEN SHALL BE ANCHORED IN EACH GROMMET WITH ZIP TIES.
- 6. FABRIC WEIGHT SHALL MEET OR EXCEED FIVE AND THREE-TENTHS (5.3) OUNCES PER SQUARE YARD. FABRIC SHALL HAVE A THREE-PLY REINFORCED HEM ON TOP AND BOTTOM WITH BRASS GROMMETS EVERY 12".

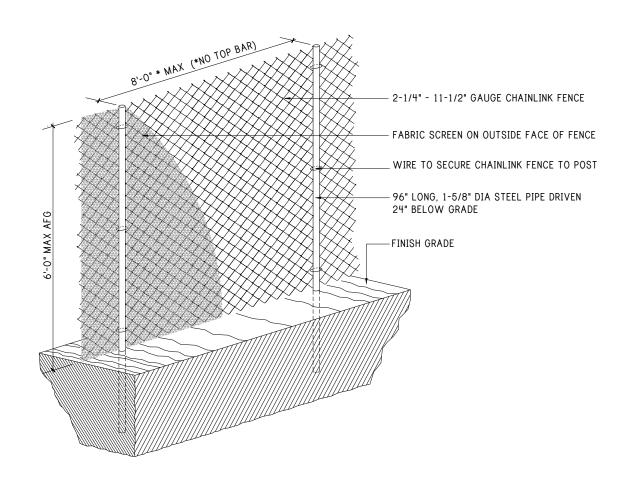

VILLAGE OF PINECREST

TEMPORARY CONSTRUCTION FENCE